


Commerc Service, s.r.o , Ku Surdoku 35, 080 01 Prešov


www.commercservice.sk

Jednoradové valčekové reťaze DIN 8187 (európske)

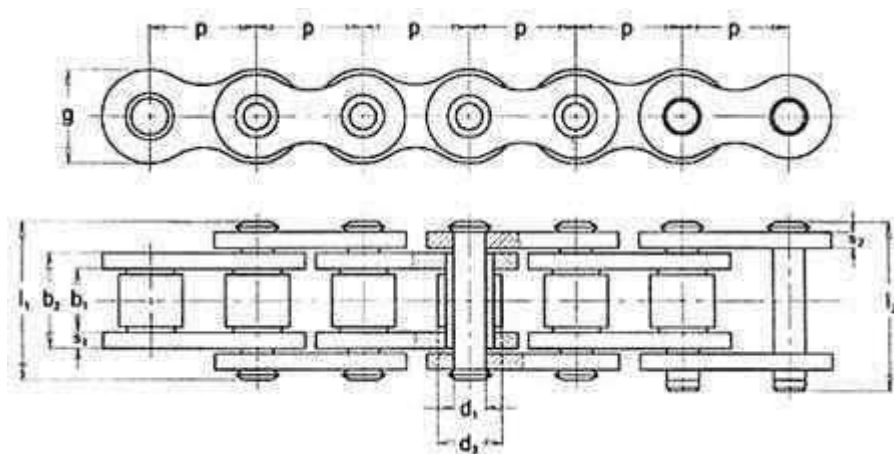


ISO Nr.	Jednoradové valčekové reťaze DIN 8187 (Európske)	P mm	b ₁ mm min.	b ₂ mm max.	d ₁ mm h9	d ₃ mm h9	l ₁ mm	l ₂ mm	g mm	s ₁ mm	s ₂ mm	f mm	F _B kN min.	Q kg/m
05B-1	318 111 039 000	8,000	3,00	4,77	2,31	5,00	8,6	11,7	7,1	0,75	0,75	11	5,0	0,2
06B-1	318 111 059 000	9,525	5,72	8,53	3,28	6,35	13,5	16,8	8,2	1,30	1,30	28	9,0	0,4
08B-1	318 111 079 000	12,700	7,75	11,30	4,45	8,51	17,0	20,9	11,8	1,60	1,60	50	18,0	0,7
10B-1	318 111 099 000	15,875	9,65	13,28	5,08	10,16	19,6	23,7	14,7	1,60	1,60	67	22,4	0,9
12B-1	318 111 119 000	19,050	11,68	15,62	5,72	12,07	22,7	27,3	14,7	1,80	1,80	89	29,0	1,2
16B-1	318 111 139 000	25,400	17,02	25,40	8,28	15,88	36,1	41,5	21,0	3,50	3,00	210	60,0	2,6
20B-1	318 111 159 000	31,750	19,56	29,00	10,19	19,05	41,2	46,0	26,0	4,50	3,50	296	95,0	3,8
24B-1	318 111 179 000	38,100	25,40	37,90	14,63	25,40	53,4	58,5	33,0	6,00	5,00	554	160,0	7,0
28B-1	318 111 199 000	44,450	30,99	46,50	15,90	27,94	65,0	69,6	36,6	7,00	6,00	739	200,0	9,1
32B-1	318 111 219 000	50,800	30,99	45,50	17,81	29,21	65,2	73,1	41,8	7,00	6,00	810	250,0	9,7
40B-1	318 111 239 000	63,500	38,10	55,70	22,89	39,37	80,4	86,3	52,0	8,00	8,00	1275	380,0	16,8
48B-1	318 111259 000	76,200	45,72	70,50	29,24	48,26	99,1	107,9	63,4	12,00	10,00	2061	600,0	25,9

Dvojrádové valčkové reťaze DIN 8187 (európske)

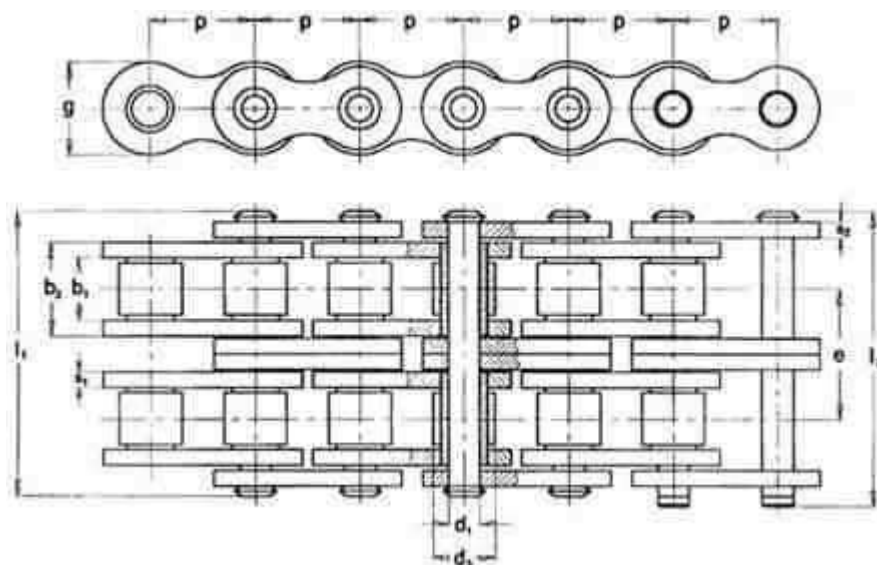


ISO Nr.	Dvojrádové valčkové reťaze DIN 8187 (Európske)	P mm	b ₁ mm min.	b ₂ mm max.	d ₁ mm h9	d ₃ mm h9	l ₁ mm	l ₂ mm	g mm	s ₁ mm	s ₂ mm	f mm	F _B kN min.	Q kg/m
05B-2	318 112 039 000	8,000	3,00	4,77	2,31	5,00	14,3	17,4	7,1	0,75	0,75	22	7,8	0,4
06B-2	318 112 059 000	9,525	5,72	8,53	3,28	6,35	23,8	27,1	8,2	1,30	1,30	56	16,9	0,8
08B-2	318 112 079 000	12,700	7,75	11,30	4,45	8,51	31,0	34,9	11,8	1,60	1,60	101	32,0	1,3
10B-2	318 112 099 000	15,875	9,65	13,28	5,08	10,16	36,2	40,3	14,7	1,60	1,60	134	44,5	1,8
12B-2	318 112 119 000	19,050	11,68	15,62	5,72	12,07	42,2	46,8	14,7	1,80	1,80	179	57,8	2,5
16B-2	318 112 139 000	25,400	17,02	25,40	8,28	15,88	68,0	73,4	21,0	3,50	3,00	421	110,0	5,2
20B-2	318 112 159 000	31,750	19,56	29,00	10,19	19,05	77,7	82,5	26,0	4,50	3,50	591	170,0	7,5
24B-2	318 112 179 000	38,100	25,40	37,90	14,63	25,40	101,0	106,9	33,0	6,00	5,00	1109	280,0	13,9
28B-2	318 112 199 000	44,450	30,99	46,50	15,90	27,94	124,0	129,2	36,6	7,00	6,00	1479	360,0	18,0
32B-2	318 112 219 000	50,800	30,99	45,50	17,81	29,21	123,8	131,7	41,8	7,00	6,00	1621	450,0	19,0
40B-2	318 112 239 000	63,500	38,10	55,70	22,89	39,37	152,7	158,6	52,0	8,00	8,00	2550	630,0	33,5
48B-2	318 112 259 000	76,200	45,72	70,50	29,24	48,26	190,0	199,1	63,4	12,00	10,00	4123	1000,0	48,6

Trojradové valčkové reťaze DIN 8187 (európske)

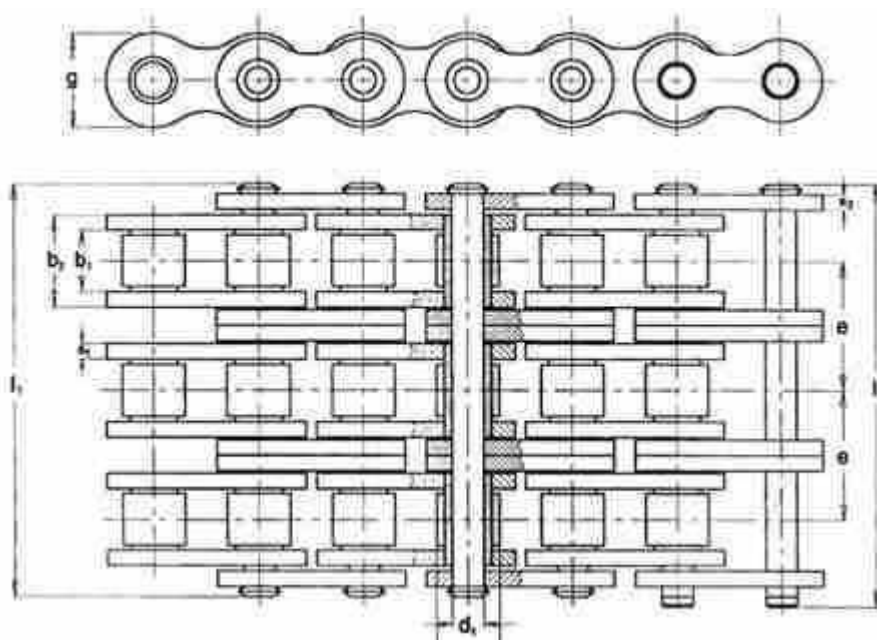


ISO Nr.	Trojradové valčkové reťaze DIN 8187 (Európske)	P mm	b ₁ mm min.	b ₂ mm max.	d ₁ mm h9	d ₃ mm h9	l ₁ mm	l ₂ mm	g mm	s ₁ mm	s ₂ mm	f mm	F _B kN min.	Q kg/m
05B-3	318 113 039 000	8,000	3,00	4,77	2,31	5,00	19,9	23,0	7,1	0,75	0,75	33	11,1	0,5
06B-3	318 113 059 000	9,525	5,72	8,53	3,28	6,35	34,0	37,3	8,2	1,30	1,30	84	24,9	1,2
08B-3	318 113 079 000	12,700	7,75	11,30	4,45	8,51	44,9	48,8	11,8	1,60	1,60	151	47,5	2,0
10B-3	318 113 099 000	15,875	9,65	13,28	5,08	10,16	52,6	56,9	14,7	1,60	1,60	202	66,7	2,8
12B-3	318 113 119 000	19,050	11,68	15,62	5,72	12,07	61,7	66,3	14,7	1,80	1,80	268	86,7	3,8
16B-3	318 113 139 000	25,400	17,02	25,40	8,28	15,88	99,9	105,3	21,0	3,50	3,00	631	165,0	7,7
20B-3	318 113 159 000	31,750	19,56	29,00	10,19	19,05	114,1	118,9	26,0	4,50	3,50	887	250,0	11,2
24B-3	318 113 179 000	38,100	25,40	37,90	14,63	25,40	150,0	155,2	33,0	6,00	5,00	1663	425,0	20,7
28B-3	318 113 199 000	44,450	30,99	46,50	15,90	27,94	184,0	188,8	36,6	7,00	6,00	2218	530,0	27,0
32B-3	318 113 219 000	50,800	30,99	45,50	17,81	29,21	181,0	190,2	41,8	7,00	6,00	2431	670,0	28,3
40B-3	318 113 239 000	63,500	38,10	55,70	22,89	39,37	225,0	230,9	52,0	8,00	8,00	3825	950,0	43,3
48B-3	318 113 259 000	76,200	45,72	70,50	29,24	48,26	281,0	290,3	63,4	12,00	10,00	6184	1500,0	72,5

Jednoradové valčkové řetěže DIN 8188 (americké)

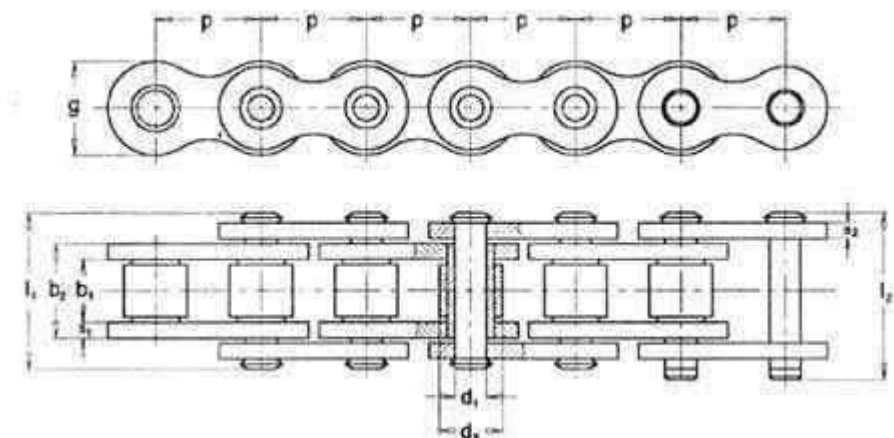


ISO Nr.	Jednoradové valčkové řetěže DIN 8188 (Americké)	P mm	b ₁ mm min.	b ₂ mm max.	d ₁ mm h9	d ₃ mm h9	l ₁ mm	l ₂ mm	g mm	s ₁ mm	s ₂ mm	f mm	F _B kN min.	Q kg/m
08A-1	318 111 069 000	12,700	7,85	11,15	3,96	7,95	17,8	21,7	12,0	0,75	1,6	44	14,1	0,6
10A-1	318 111 089 000	15,875	9,40	13,80	5,08	10,16	21,8	25,9	15,0	1,30	2,0	70	22,2	1,0
12A-1	318 111 109 000	19,050	12,57	17,70	5,94	11,91	26,9	31,5	18,0	1,60	2,4	105	31,8	1,5
16A-1	318 111 129 000	25,400	15,75	22,40	7,92	15,85	33,0	35,0	23,6	1,60	3,0	178	56,7	2,6
16A-1H	318 151 010 000	25,400	15,75	24,40	7,92	15,85	37,0	39,5	23,6	1,80	3,5	195	56,7	3,0
20A-1	318 111 149 000	31,750	18,90	27,40	9,53	19,05	40,5	45,2	29,4	3,50	4,0	261	88,5	4,0
24A-1	318 111 169 000	38,100	25,22	35,30	11,10	22,23	50,8	55,5	35,0	4,50	5,0	392	127,0	6,0
28A-1	318 111 189 000	44,450	25,22	37,00	12,70	25,40	54,7	59,3	41,0	6,00	5,5	470	172,4	7,0
32A-1	318 111 209 000	50,800	31,55	45,00	14,27	28,58	65,5	69,6	47,0	7,00	6,5	642	226,8	10,0
40A-1	318 111 229 000	63,500	37,85	54,70	19,84	39,68	79,6	85,4	59,0	7,00	8,0	1085	353,8	16,6
48A-1	318 111 249 000	76,200	47,35	67,50	23,40	47,63	95,5	103,1	70,0	8,00	9,5	1607	510,3	22,6

Dvojrádové valčkové reťaze DIN 8188 (americké)

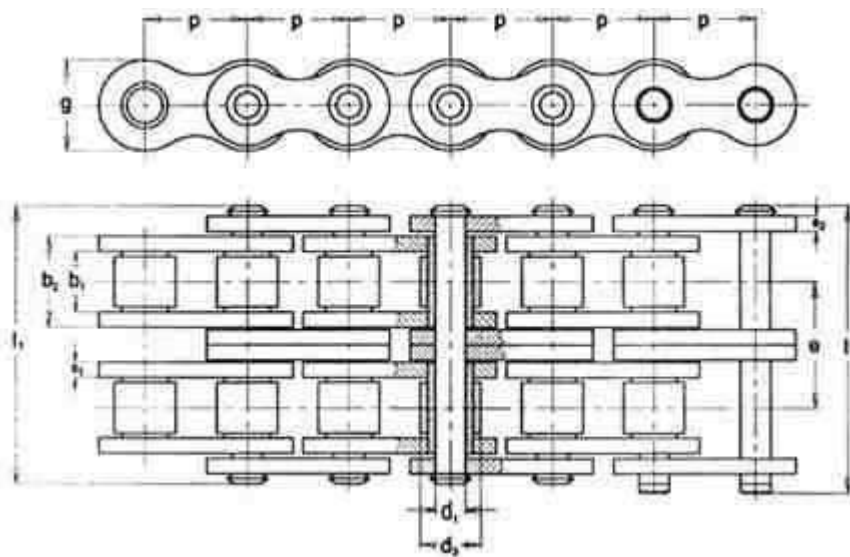

ISO Nr.	Dvojrádové valčkové reťaze DIN 8188 (Americké)	P mm	b ₁ mm min.	b ₂ mm max.	d ₁ mm h9	d ₃ mm h9	l ₁ mm	l ₂ mm	g mm	s ₁ mm	s ₂ mm	e mm	f mm	F _B kN min.	Q kg/m
08A-2	318 112 069 000	12,700	7,85	11,15	3,96	7,95	32,3	36,2	12,0	1,6	1,6	14,38	88	28,2	1,2
10A-2	318 112 089 000	15,875	9,40	13,80	5,08	10,16	39,9	44,0	15,0	2,0	2,0	18,11	140	44,4	1,9
12A-2	318 112 109 000	19,050	12,57	17,70	5,94	11,91	49,8	44,4	18,0	2,4	2,4	22,78	210	63,6	2,9
16A-2	318 112 129 000	25,400	15,75	22,40	7,92	15,85	62,7	66,0	23,6	3,0	3,0	29,29	356	113,4	5,0
16A-2H	318 152 010 000	25,400	15,75	24,40	7,92	15,85	67,5	70,0	23,6	3,5	3,5	32,30	385	113,4	6,5
20A-2	318 112 149 000	31,750	18,90	27,40	9,53	19,05	76,4	81,2	29,4	4,0	4,0	35,76	522	177,0	7,9
24A-2	318 112 169 000	38,100	25,22	35,30	11,10	22,23	96,3	100,9	35,0	5,0	5,0	45,44	784	254,0	11,8
28A-2	318 112 189 000	44,450	25,22	37,00	12,70	25,40	102,8	108,2	41,0	5,5	5,5	48,87	940	344,8	13,8
32A-2	318 112 209 000	50,800	31,55	45,00	14,27	28,58	124,0	128,2	47,0	6,5	6,5	58,55	1284	453,6	19,9
40A-2	318 112 229 000	63,500	37,85	54,70	19,84	39,68	151,0	157,0	59,0	8,0	8,0	71,55	2170	707,6	33,0
48A-2	318 112 249 000	76,200	47,35	67,50	23,40	47,63	183,0	191,0	70,0	9,5	9,5	87,83	3213	1020,6	44,0

Trojradové valčkové reťaze DIN 8188 (americké)

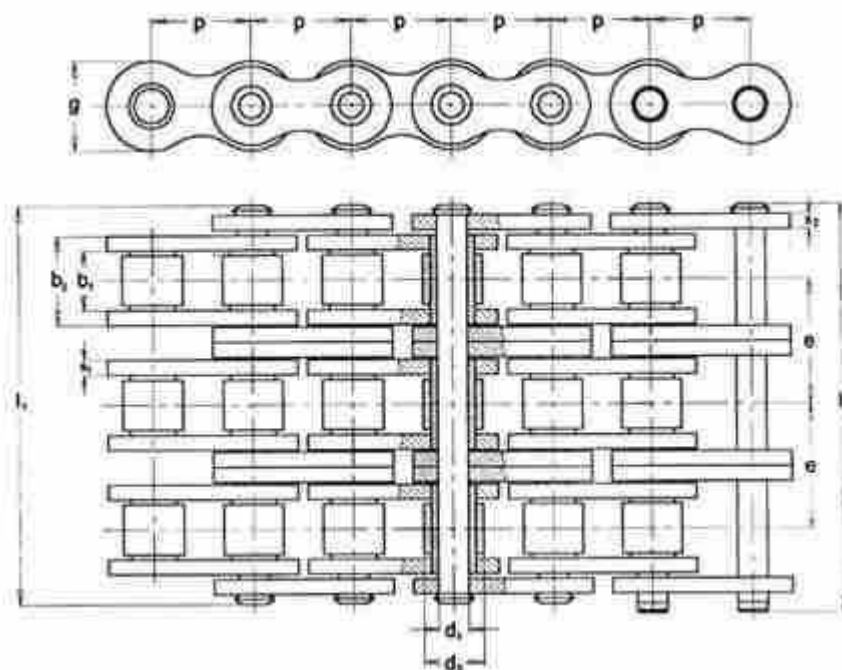

ISO Nr.	Trojradové valčkové reťaze DIN 8188 (Americké)	P mm	b ₁ mm min.	b ₂ mm max.	d ₁ mm h9	d ₃ mm h9	l ₁ mm	l ₂ mm	g mm	s ₁ mm	s ₂ mm	e mm	f mm	F _B kN min.	Q kg/m
08A- ₃	318 113 069 000	12,700	7,85	11,15	3,96	7,95	46,7	50,6	12,0	1,6	1,6	14,38	132	42,3	1,8
10A- ₃	318 113 089 000	15,875	9,40	13,80	5,08	10,16	57,9	62,0	15,0	2,0	2,0	18,11	210	66,6	2,9
12A- ₃	318 113 109 000	19,050	12,57	17,70	5,94	11,91	72,6	77,2	18,0	2,4	2,4	22,78	315	95,4	4,3
16A- ₃	318 113 129 000	25,400	15,75	22,40	7,92	15,85	90,5	95,0	23,6	3,0	3,0	29,29	535	170,1	7,5
20A- ₃	318 113 149 000	31,750	18,90	27,40	9,53	19,05	112,2	117,2	29,4	4,0	4,0	35,76	783	265,5	11,9
24A- ₃	318 113 169 000	38,100	25,22	35,30	11,10	22,23	141,0	146,4	35,0	5,0	5,0	45,44	1176	381,0	17,6
28A- ₃	318 113 189 000	44,450	25,22	37,00	12,70	25,40	151,8	157,0	41,0	5,5	5,5	48,87	1410	517,2	20,7
32A- ₃	318 113 209 000	50,800	31,55	45,00	14,27	28,58	182,0	186,7	47,0	6,5	6,5	58,55	1926	680,4	29,7
40A- ₃	318 113 229 000	63,500	37,85	54,70	19,84	39,68	222,7	228,5	59,0	8,0	8,0	71,55	3256	1061,4	43,3
48A- ₃	318 113 249 000	76,200	47,35	67,50	23,40	47,63	271,0	278,8	70,0	9,5	9,5	87,83	4820	1530,9	66,0

Reťaze ČZ VELO, MOTO a rozvodové

Označenie		ISO	P	b1	d1	d2	b4-b5-b6	h	pt	min. pevnosť		Hmotnosť max. kg/m
ISO	Obchodné	Popis	Rozteč reťaze mm	Vnútna šírka min. mm	O valčeka (púzdra) mm	O čapu mm	dĺžka čapu max. mm	Šírka vnút. došt. mm	Vzdialenosť radov mm	podľa ISO kN	podľa výrobcu kN	
Reťaze VELO ČZ												
081-1	1/2" x 1/8" VELO		12,7	3,30	7,75	3,66	10,2	10,0	-	8,00	8,20	0,27
410	1/2" x 1/8" Bicross		12,7	3,30	7,75	3,66	9,2	9,7	-	-	10,00	0,30
082-1	1/2" x 3/32" Favorit Super		12,7	2,38	7,75	3,66	8,2	10,0	-	9,80	10,29	0,26
	1/2" x 3/32" UG		12,7	2,38	7,75	3,66	8,2	10,0	-	9,80	10,29	0,26
	1/2" x 3/32" F100		12,7	2,38	7,65	3,66	7,3	8,2	-	-	10,80	0,24
	1/2" x 3/32" F300		12,7	2,38	7,65	3,66	7,3	8,2	-	-	10,50	0,24
	1/2" x 3/16" VELO		12,7	4,88	7,75	3,66	10,7	9,9	-	-	8,40	0,33
Reťaze MOTO ČZ												
083-1	1/2" x 3/16" VELO Transport		12,7	4,88	7,75	4,18	13,0	10,9	-	11,60	10,50	0,49
084-1	1/2" x 3/16" MOFA		12,7	4,88	7,75	4,18	13,0	10,9	-	13,60	15,75	0,49
	1/2" x 1/14" MOFA		12,7	6,40	7,75	4,18	14,5	10,9	-	-	15,75	0,54
420	1/2" x 1/14" MOFA Cross		12,7	6,40	7,75	4,18	16,2	11,8	-	-	17,60	0,70
086-1	1/2" x 5,2		12,7	5,21	8,51	4,45	14,5	12,0	-	17,80	18,69	0,62
428	1/2" x 5/16" Cross		12,7	7,75	8,51	4,18	17,4	12,0	-	-	23,50	0,83
428 OR	1/2" x 5/16" OR		12,7	7,75	8,51	4,18	19,6	12,0	-	-	20,70	0,90
08-B1	1/2" x 5/16" I		12,7	7,75	8,51	4,18	17,0	12,0	-	17,80	18,69	0,70
	5/8" x 1/4" Cross - Gold		15,875	6,48	10,16	5,08	17,0	14,5	-	-	31,80	0,89
520	5/8" x 1/4"		15,875	6,48	10,16	5,3	17,9	14,5	-	11,60	33,60	0,93
520 OR	5/8" x 1/4" OR		15,875	6,48	10,16	5,3	20,3	14,5	-	-	32,00	1,02
530 OR	5/8" x 3/8" OR		15,875	9,65	10,16	5,3	23,5	14,5	-	-	32,00	1,29

525	5/8'' x		15,875	7,94	10,16	5,3	21,7	14,5	-	-	33,36	1,15
OR	5/16'' OR											
630	3/4'' x		19,06	9,65	11,91	6,1	26,2	17,7	-	-	44,18	1,71
OR	3/8'' OR											
Řetaze rozvodové ČZ												
06 B-1	3/8'' x	RD	9,525	5,72	6,35	3,28	13,3	8,4	-	8,90	9,345	0,40
	5,72 I											
	3/8'' x	RD	9,525	5,72	6,35	3,28	13,3	8,2	-	-	14,30	0,72
	5,72 I											
	zosílený											
06 B-2	3/8'' x	RD	9,525	5,72	6,35	3,28	23,8	8,4	10,24	16,90	17,745	0,76
	5,72 II											
06 B-3	3/8'' x	RD	9,525	5,72	6,35	3,28	34,0	8,4	10,24	24,90	26,145	1,12
	5,72 III											
06 C-1	ASA 35 I		9,525	4,77	5,08	3,58	13,2	9,05	-	7,90	8,295	0,37
06 C-2	ASA 35 II		9,525	4,77	5,08	3,58	23,4	9,05	10,13	15,80	17,60	0,73
06 C-3	ASA 35 III		9,525	4,77	5,08	3,58	33,5	9,05	10,13	23,70	24,50	1,09
062	3/8'' x		9,525	9,52	6,00	4,18	17,8	9,3	-	11,80	12,39	0,57
C-1	3/8''											
	219		7,774	4,60	4,69	3	12,0	7,4	-	-	10,50	0,30